



Maximum Performance



FCU 1600/500, FCU 2000/500, FCU 2600/500, FCU 3200/500

FEATURES AND BENEFITS

- Large surface contact with linen over an angle of 300°
- Finger protection and emergency button for more safety
- Durable M-Aramid ironing belts
- Automatic cooldown
- Easy to operate microprocessor: 20 pre-set ironing programmes
- Indication of ironing speed and temperature
- Reverse mode possible
- Frequency controlled motor
- Easy to remove lint filters
- Space saving installation against the wall is possible: front return
- Electric, gas or steam heating
- Overheating check system with 3 temperature sensors

OPTIONS


- Foot pedal for easy start and stop operation
- Chrome-plated cylinder for a better thermal conduction

INDUSTRIAL CYLINDER HEATED DRYING IRONERS


TYPE		FCU 1600/500	FCU 2000/500	FCU 2600/500	FCU 3200/500
Roller diameter	mm	500	500	500	500
Useful roller length	mm	1600	2000	2600	3200
HEATING					
Electric	kW	33	38	55	65
Gas	kW	30	36	52	66
Steam	kg/h	36	49	68	88
MOTOR					
Roller motor	kW	0,37	0,37	0,37	0,37
Fan motor	kW	0,18/0,255	0,18/0,255	2x0,18/0,255	2x0,18/0,255
Exhaust ventilation	mm	1x150	1x150	2x150	2x150
IRONING CAPACITY*					
Electrical & gas heating	kg/h	65	80	95	120
Steam heating	kg/h	80	95	115	145
Roller speed	m/min	1,5-8	1,5-8	1,5-8	1,5-8
Electric connection		3x208-240V 50/60Hz 3x380-415V+N 50/60Hz	3x208-240V 50/60Hz 3x380-415V+N 50/60Hz	3x208-240V 50/60Hz 3x380-415V+N 50/60Hz	3x208-240V 50/60Hz 3x380-415V+N 50/60Hz
Dimensions HxWxD	mm	1232x2350x992	1232x2750x992	1232x3350x992	1232x3950x992
TRANSPORT DATA					
Gross weight	kg	1120	1350	1500	1850
Net weight	kg	920	1150	1290	1590
Volume (crate packed)	m ³	4,24	4,97	6,00	7,03
Crate packing HxWxD	mm	1550x2490x1100	1550x2890x1100	1550x3490x1100	1550x4090x1100

* Data from lab according to standard ISO9398-1. The actual capacity depends on laundry conditions and operators which could be 20% - 40% lower. The data concerning dimensions of machines include all extended parts.


FRONT

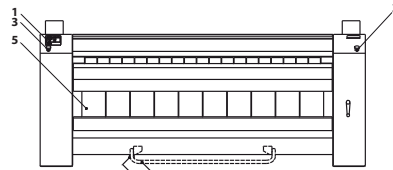


TOP

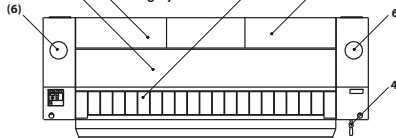

BACK MODEL S

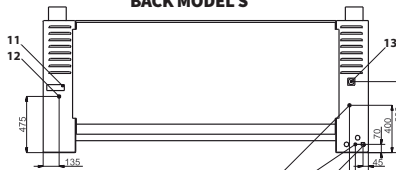


BACK MODEL E



BACK MODEL G



SIDE



- Control panel
- Upper cover
- Emergency stop
- Manual drive of roller
- Ironing belts
- Exhaust ventilation
(2 for FCU 2600/500, FCU 3200/500)
- Pedal used for starting/stopping belts' movement (only for version OPL)
- Pedal microswitch (only for version OPL)
- Insertion belts/feeding table
- Cover of filter sieve
- Name plate
- Condense drain G 3/4" (only for version "S")
- Main switch
- Upper trough
- Steam supply G 3/4" (only for version "S")
- External protective connector
- Lower trough
- Bolts of side cover
- Main power supply
- Gas supply G 3/4" (only for version "G")
- Electric power supply for heating system (version "E" only)

TO LEARN MORE, OR TO FIND A DISTRIBUTOR IN YOUR AREA, VISIT UNIMAC.COM
ALLIANCE LAUNDRY SYSTEMS - SHEPARD ST, RIPON WI 54971 - +1 800 587 5458

Consult your UniMac® distributor for details. For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management systems at Alliance Laundry Systems' Ripon facility has been registered to ISO 9001:2008.

©2018 Alliance Laundry Systems LLC.

UniMac® by Alliance Laundry Systems